

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

Express Mail No. EV192308212US

MATERIALS AND PROCESSING IN MANUFACTURING

Copyright © 1979, Darvic Associates, Inc.

Printed in the United States of America

All rights reserved. No part of this book may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or any information storage and retrieval system, without permission in writing from the Publisher.

Earlier editions © 1957 and 1962 by Macmillan Publishing Co., Inc., copyright © 1969 by E. Paul DeGarmo, and copyright © 1974 by Darvic Associates, Inc.

Macmillan Publishing Co., Inc.
866 Third Avenue, New York, New York 10022
Collier Macmillan Canada, Ltd.

Library of Congress Cataloging in Publication Data

DeGarmo, E. Paul, (date)

Materials and processes in manufacturing.

Bibliography: p.

Includes index.

1. Manufacturing processes. 2. Materials.

I. Title.

TS183.D4 1979 671 78-3456

ISBN 0-02-328120-0 (Hardbound)

ISBN 0-02-978760-2 (International Edition)

Printing 2 3 4 5 6 7 8 Year 9 0 1 2 3 4 5

; dimensional stability; translucence.
 nce; dimensional stability.
 roperties and low moisture absorption.

creasingly, particularly for imparting high
 atures. "Whiskers" of various metals and
 ss steel, columbium, tantalum, titanium,
 used. These are from 1 to 5 μm (39 to 197
 to 1000 μm (0.0012 to 0.039 inch) in
 sticity and tensile strengths up to 21 000
 on is the use of filaments of glass, graphite,
 an 0.1 mm in diameter but of any desired
 strengths up to 2450 MPa (350,000 psi)
 20 000 MPa (60 million psi). Glass-fiber
 erial.

n acts as the binding material surrounding
 he mass together. Thus the surface of a
 resin with no filler exposed.

: dyes, which actually alter the color of the
 ough their presence impart a desired color.
 elves produce attractive colors, so a dye is

l amounts to increase and control the flow
 : amount needed for a given resin is gov-
 As a rule, the amount of plasticizer is held
 to affect the stability of the finished prod-
 ng.

amounts to improve the moldability and
 he molds. Wax, stearates, and occasionally
 y also are held to a minimum because they

plastics as adhesives is highly developed,
 panded tremendously in recent years. This
 1 Chapter 33.

e base of many ablative coating materials
 to provide short-time protection for low-
 ense heating conditions or the heating ex-
 ering the earth's atmosphere. Ablation in-
 igh polymers into low-molecular-weight
 1 char. Some of the heat absorption also
 ical decomposition.

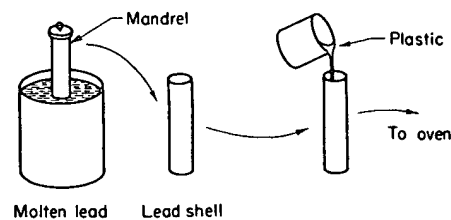


FIGURE 9-8. Steps in the casting of plastic parts.

Production processes for plastic products. Not only does the designer have a large number of plastics available from which he can select, there are a number of quite distinct processes by which a chosen plastic can be converted into a desired product. *Casting, hot-compression molding, injection molding, transfer molding, extrusion, laminating, and cold molding* are all used extensively. Each has certain advantages and limitations that bear on part design, material selection, and final cost, and not every plastic is suitable for each process. Because it usually is desirable to convert the material into the finished product in a single-process operation, it is important to have an understanding of the various processes so that the material-process selection will be optimal.

Casting is the simplest of the processes because no fillers are used and no pressure is involved. Of course, a mold is required. For certain simple shapes, a model of the product can be made, usually of steel, and then dipped into molten lead until a thin sheath of lead is formed over the model. The model, or mandrel, then is pulled out of the lead sheath, leaving a thin, lead mold into which the liquid plastic is poured. The resin then is cured, usually in an oven at low temperatures (65.6 to 93°C; 150 to 200°F), as indicated in Figure 9-8. After removal from the oven, the lead shell is stripped from the finished product. Some plastics, of course, can be cured at room temperatures.

Because cast plastics contain no fillers, they have a distinctive lustrous appearance. The process is inexpensive because no expensive dies or equipment are involved. However, it is limited to small objects of rather simple shape. Small radio cabinets, jewelry, and ornamental objects are commonly made by this process.

Blowmolding is used extensively for making hollow products, such as bottles and other containers. The steps in this process are illustrated in Figure 9-9.

In *hot-compression molding*, indicated schematically in Figure 9-10, granules or preformed tablets of the raw, mixed plastic material are loaded into the cavity of an open, heated mold. The plunger (male member) of the mold, usually attached to the upper portion of the press, descends, closing the mold and creating sufficient pressure to force the plastic, as it becomes fluid, into all portions of the cavity. After the material has set, or cured, the mold is opened and the part is removed. Usually, a number of cavities are contained within a single mold. The process is simple, but its use is restricted almost